

60X60X38 mm

TF0638-22 Series



- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS



Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Power (Watt)	Noise (dBA)	Weight (g)
TF0638-4UR	B S H F	48	40.8~60.0	63.84	1.330	12000	0.46	22.08	22.08	65.5	113
TF0638-4SR				55.86	1.160	10500	0.35	16.80	16.80	60.2	
TF0638-4HR				42.56	0.890	8000	0.23	11.04	11.04	56.5	
TF0638-4LR				26.60	0.490	5000	0.13	6.24	6.24	50.4	
TF0638-1HR		12	10.2~13.8	41.49	0.860	7800	0.64	7.68	7.68	48.7	
TF0638-1MR				34.58	0.750	6500	0.45	5.40	5.40	41.5	
TF0638-1LR				26.60	0.490	5000	0.26	3.12	3.12	38.7	
TF0638-1LR				26.60	0.490	5000	0.26	3.12	3.12	38.7	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM".

Please contact us for detail if your request bearing system is not shown in the above list.

JAMICON FAN PERFORMANCE CURVES

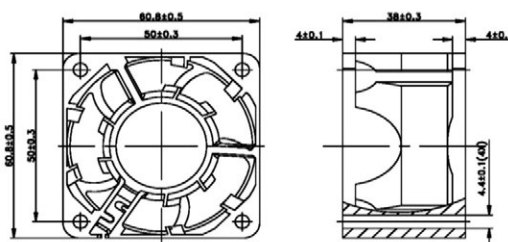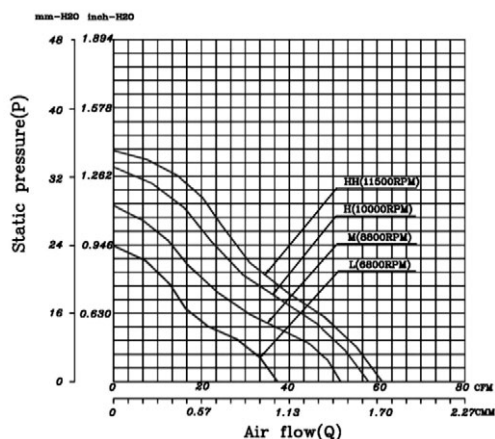

Unit: mm