

CUSTOMER: 神牛

NO.: 2019112004

DISTRIBUTOR: 健策

(PE48AA1)

APPROVE SHEET

[Compliance with RoHS]

PRODUCT: DC BRUSHLESS FAN

USER P/N.: _____

Parts No.: KF0410B1MR03LCJEVR

Printed model number on the stick: KF0410B1MR-R

(SIGNATURE)

JAMICON GROUP
DONGGUAN JAMICON ELECTRONIC CO., LTD
Tel: +86-769-87919555



APPROVED	CHECKED	DRAWN
		王海寧 2019/11/20

微信扫码
咨询工程师



ECN 變更履歷表

成品料號:	KF0410B1MR03LCJEVR	客戶:	健策-神牛
版本	變更內容	日期	
A0	初版	2019/11/20	

JIAN 健策

JIAN 健策
0755—23706799

KAIMEI ELECTRONIC CORP.



1. MECHANICAL:

1-01	Dimension	Dimension of fan shall be shown in the outline styling drawing attached.
1-02	Motor	Four-pole motor.
1-03	Frame	Plastic material UL 94V-0 (P.B.T) .
1-04	Impeller	Plastic material UL 94V-0 (P.B.T) .
1-05	Free drop shock	In minute package condition, the fan should withstand each one drop of three faces from 30cm distance height onto 10 mm thickness of wooden board.

2.ELECTRICAL: 25℃/65%RH

2-01	Rated current	Rated current shall be measured after 30 minutes continuous rotation at rated voltage.
2-02	Start voltage	The voltage that enable to start the fan by sudden switch on.
2-03	Rated Speed	Rated speed shall be measured after 30 minutes continuous rotation at rated voltage.
2-04	Input Power	Input power shall be measured after 30 minutes continuous rotation at rated voltage.
2-05	Lock Current	Locked current shall be measured Within one minute at rotor locked, after 30 minutes continuous rotation at rated voltage in clear air.
2-06	Insulation resistance	More than 10M ohm at 500 V.D.C between lead and housing.
2-07	Dielectric strength	Measured 5 mA(max) trip current at 700 V.A.C for 3 sec. between lead and housing.
2-08	Locked motor protection	Designed to meet UL, CUL and TUV.

DO NOT use power or ground PWM to control the fan speed.If the fan speed needs to be adjusted,please contact JAMICON to customize the product design for your application.

JIAN 健策


0755—23706799

微信扫码
咨询工程师



3.CHARACTERISTICS:

3-01	Air Flow & Static Pressure	The air flow data and static pressures should be determined in accordance with AMCA standard or DIN 24163 specification in a double- chamber testing with intake-side measurement.
3-02	Noise level	The measurement of noise level is carried out with reference to DIN 45635 in an echoic chamber with the microphone positioned 1 M from the air intake. Testing fan shall be hung in clean air.

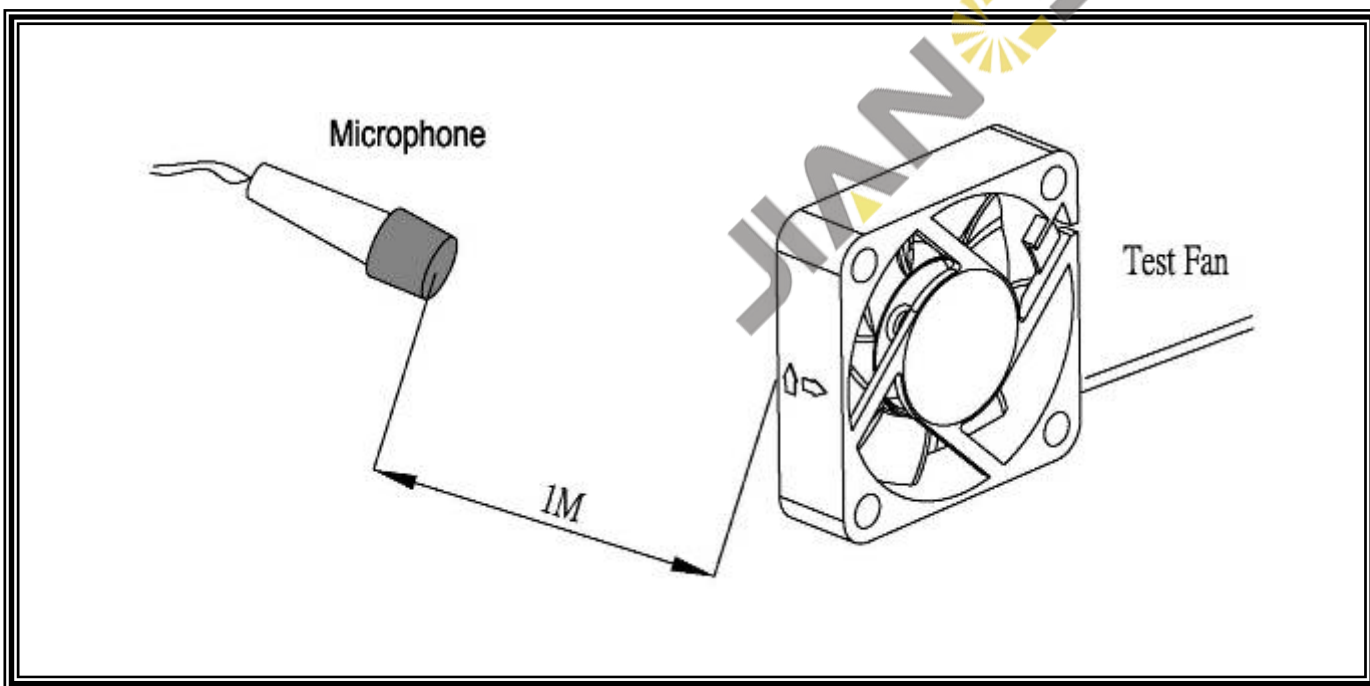

4.ENVIRONMENTAL:

4-01	Operating temperature	-10℃ to 70℃ (ordinary humidity)
4-02	Storage Temperature	-40℃ to 70℃ (ordinary humidity)
4-03	Humidity	After 96 hrs, 95% RH 40±2℃ per MIL-STD-202F method 103B, Humidity test , The measured data of insulation resistance & dielectric strength should meet the specification listed in attach.
4-04	Thermal Shock	After thermal shock test per MIL-STD-202F method 107D, Condition D, The measured data of insulation resistance & dielectric strength should the specification.

JIAN 健策

0755—23706799

微信扫码
咨询工程师



5.DATA-SHEET:

SAP NO.: K0410B1MR03LCJEV

PARTS NO.: KF0410B1MR03LCJEVR

5-1. SPECIFICATION:

NO.	ITEM	SPECIFICATION	UNIT	CONDITION
5-1-01	Dimension	40*40*10	mm	-----
5-1-02	Bearing	Dual Ball	-----	-----
5-1-03	Rated Voltage	12.0	VDC	-----
5-1-04	Operating Voltage	7.0 ~13.8	VDC	MAX. 13.8V
5-1-05	Start Voltage	7.0	VDC	On/off test max.
5-1-06	Speed	5400	R.P.M	±10%,At rated Voltage
5-1-07	Input Current	0.058	Amp	At rated Voltage
5-1-08	Input Power	0.70	Watt	At rated Voltage
5-1-09	Nominal Power	0.7	Watt	At rated Voltage
5-1-10	Air Flow	5.75	CFM	At 0 static Pressure of rated speed
5-1-11	Static Pressure	0.106	inchH ₂ O	At 0 air flow of rated speed
5-1-12	Noise	24.4	dBA	At rated speed
5-1-13	Life Expectancy(L10)	80,000	Hours	At 40°C (Bearing)
5-1-14	Motor protection	Electronic protected		
5-1-15	Polarity protection	It will not damage the fan while reverse input.		
5-1-16	Auto Restart	YES	-----	-----
5-1-17	Speed Signal output	NO	-----	-----
5-1-18	Alarm Signal output	NO	-----	-----
5-1-19	Rotation direction	From the label side	-----	Clockwise
5-1-20	Weight	16	Gram	Per each piece
5-1-21	Safety Certificate	UL, CUL, TUV, CE	-----	-----


5-2. LEAD WIRE:

NO.	ITEM	SPECIFICATION			
5-2-01	AWG NO. & Authorize	26AWG, UL1061			
5-2-02	Color	—	+		
		Black	Red		
5-2-03	Line Length	50±5 mm			
5-2-04	Connector	Notes as: Pitch:1.25mm Housing:Molex 51021-0200 compatible parts.			
5-2-05	Tube	NO			



JAMICON

FAN PERFORMANCE CURVES

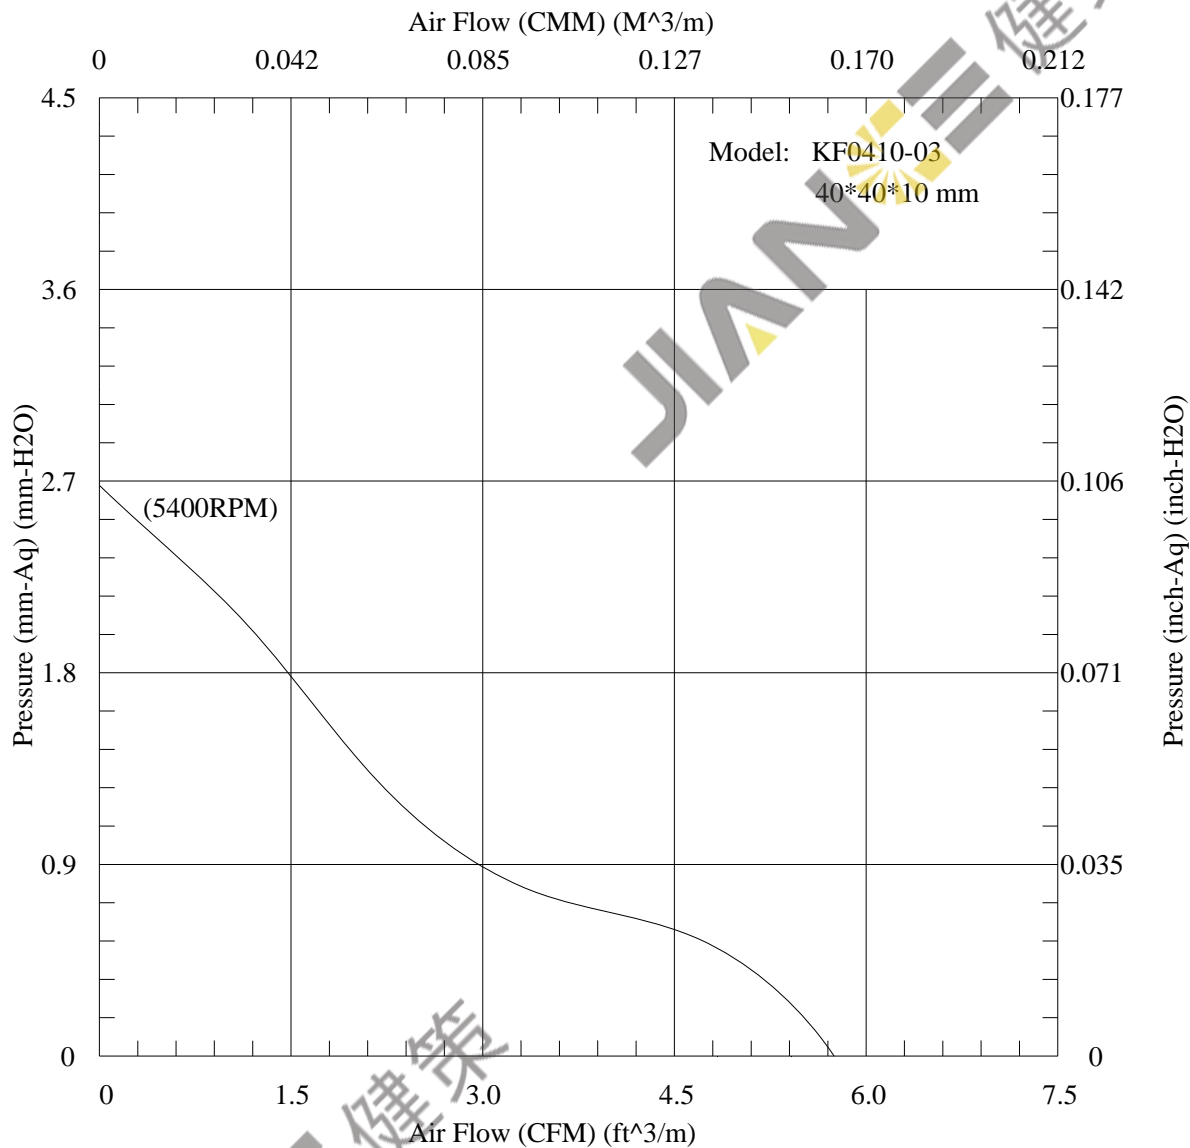

JIAN 健策

0755—23706799

微信扫码
咨询工程师



KAIMEI ELECTRONIC CORP.

風扇振動噪音性能測試報告

(The Test Report of Fan Vibration and Noise)

風扇型號(Sample Type): KF0410


基本規格(Properties): DC 1V 7葉 4極 5400RPM

測試日期(Test Date): 2005/7/20 PM 03:08:56

測試編號(Test No.): (1)



測試條件(Test Conditions)

輸入電壓(Input Voltage): V
 量測時間(Measuring Time): 20 sec
 麥克風距離(Mic. Distance): 100 cm
 麥克風角度(Mic. Angle): 180°
 頻域加權(Freq. Weighting): A
 時域加權(Time Weighting): SLOW
 背景噪音(Background Noise): 15.0 dB(A)
 溫度(Temperature): °C
 相對濕度(Relative Humidity): %



測試結果(Test Results)

電壓(Passing Voltage):
 電流(Electric Current):
 消耗功率(Power Dissipation):
 轉速(Rotation Speed): 5405 RPM
 振動量(Vibration Level) (依據 ISO 2372):
 振動速度(Vib. Velocity): 0.73 mm/sec RMS
 均態聲壓位準(Time-averaged SPL, Leq) (依據 CNS 8753):
 量測點(At Meas. Point): 24.7 dB(A)
 1 米處(At 1m Point): 24.4 dB(A)
 最大聲壓位準(MaxL): 24.9 dB(A)
 最小聲壓位準(MinL): 22.8 dB(A)

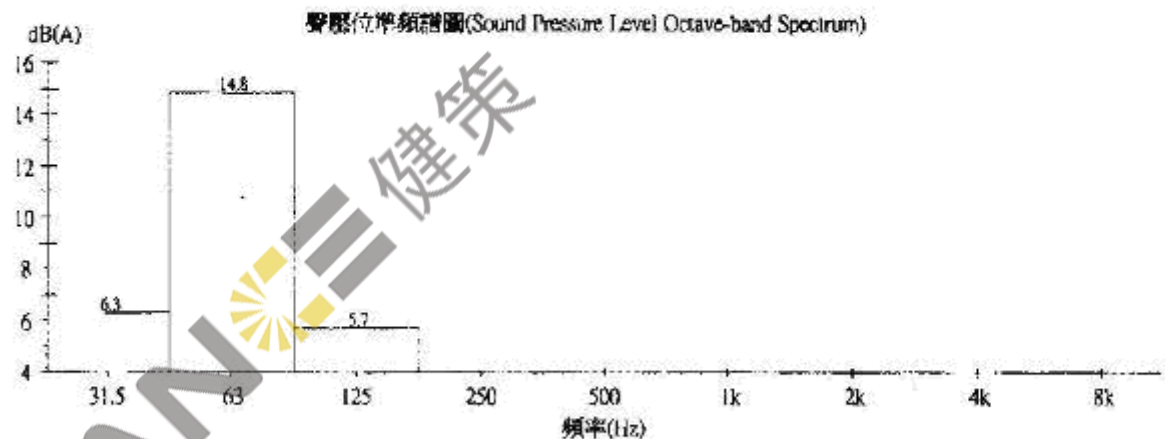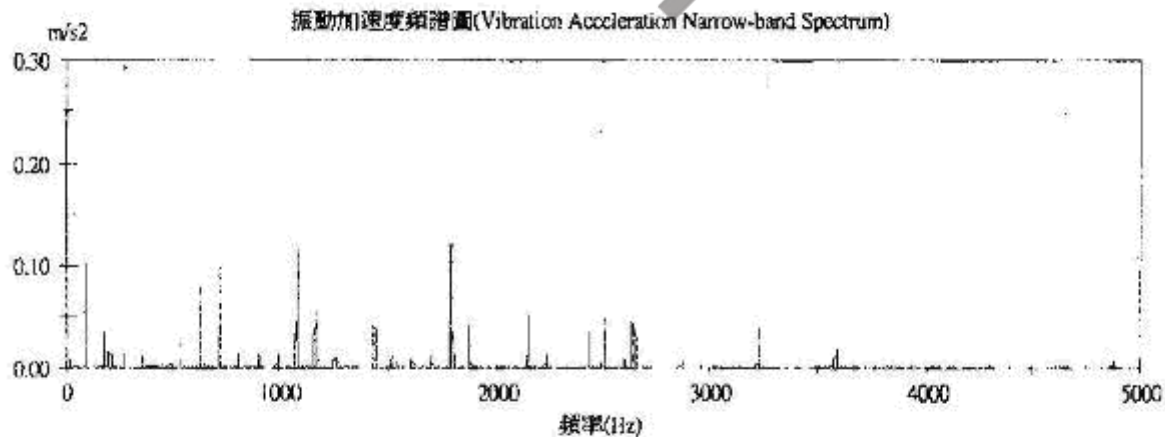


簽核人員: _____

系統開發(Developer): 工業技術研究院 機械工業研究所(MER/ITRD)

操作員: 簽章: _____

JIAN 健策
 2005/7/20 PM 03:15:15 列印
 0755-23706799



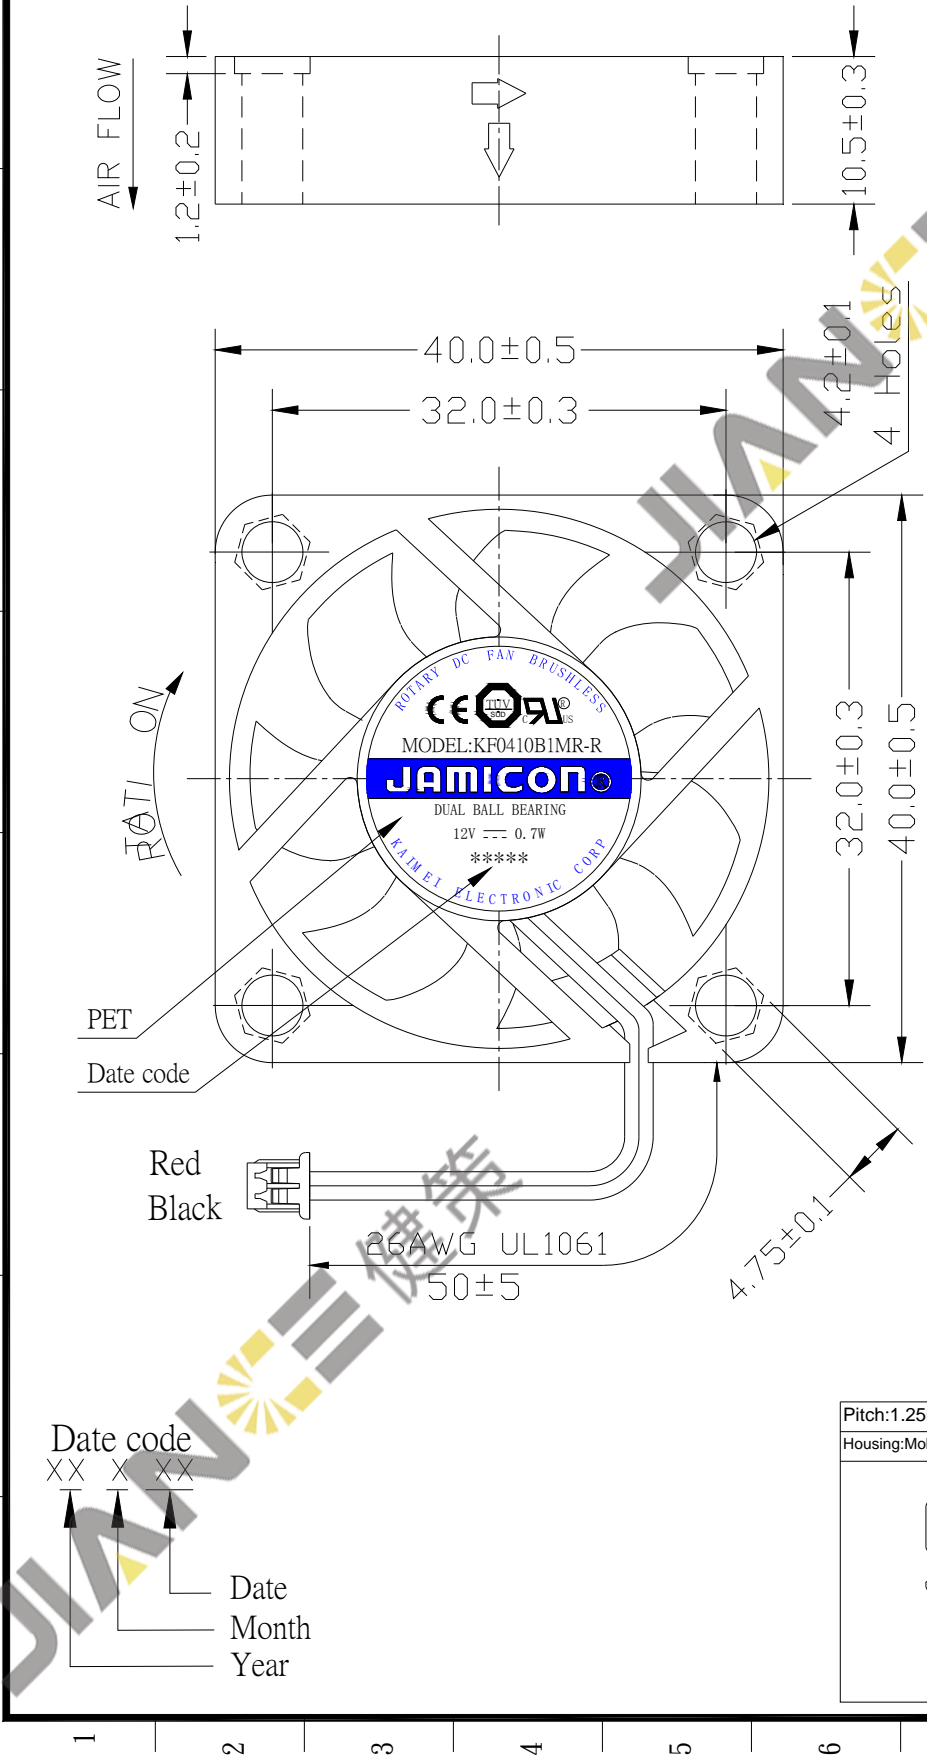

SCALE	PRODUCT	UNIT
	APPEARANCE OF FAN	mm
SAP NO.:	K0410B1MR03LCJEV	
PARTS NO.:	KF0410B1MR03LCJEVR	
REV.	0	
DESCRIPTION		
DESIGN	王海寧	DATE
	2019/11/20	

凱美電機有限公司
KAI MEI ELECTRONIC CORP.

JAMICON

Date code
XX XX XX
Date
Month
Year

Pitch:1.25mm
Housing:Molex 51021-0200 compatible parts.

JIAN 健策
0755—23706799



Auto-restart

Fan motor speed

